


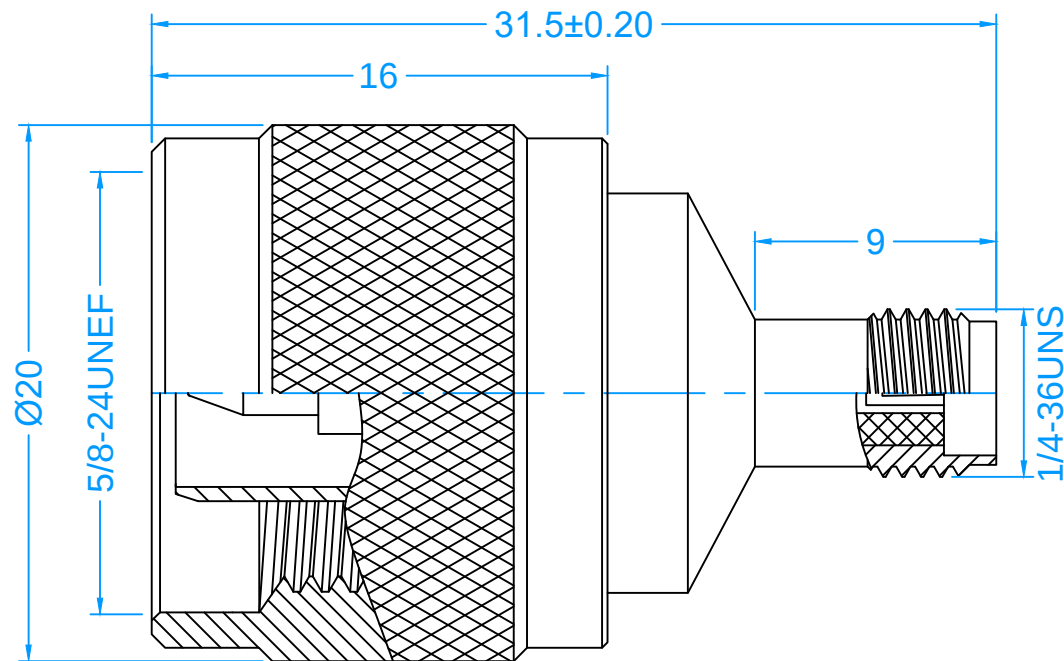

Meets MIL-C-39012, IEC60169-15, IEC60169-16, CECC 22110, CECC 22210.
Precision Machining and High Quality Grade Material.

TECHNICAL CHARACTERISTICS

Impedance 50Ω
Working Voltage <335V r.m.s
Center Contact Resistance ≤3mΩ
Insulation Resistance ≥5000MΩ
Durability ≥500 cycles
Weight 29.83g Ref.

Frequency Range DC-6GHz
Withstanding Voltage 1000V r.m.s
Outer Contact Resistance ≤2.5mΩ
VSWR ≤1.2
Temperature Range -55°C to 155°C

3	Contact	1	Phosphorus Bronze	Gold
2	Insulator	1	PTFE	
1	Body	1	Brass	Nickel
No.	Description	QTY	Material	Finish

RoHS
Compliant

THIRD ANGLE PROJECTION

* MAJOR DIMENSION
UNLESS OTHERWISE
NOTED TOLERANCES

SCALE 1:1 UNIT MM

APPROVED
JOHN

CHECKED
TERRY

DRAWN
KEVIN

DRAWN DATE
05 Mar. 2008

KeMy Electronic Technology Inc.

TITLE
N (M) Plug to SMA (F) Jack Adapter

DRAWING NO. KM-030103-2

REV
0

All rights reserved. www.dgkemy.com