


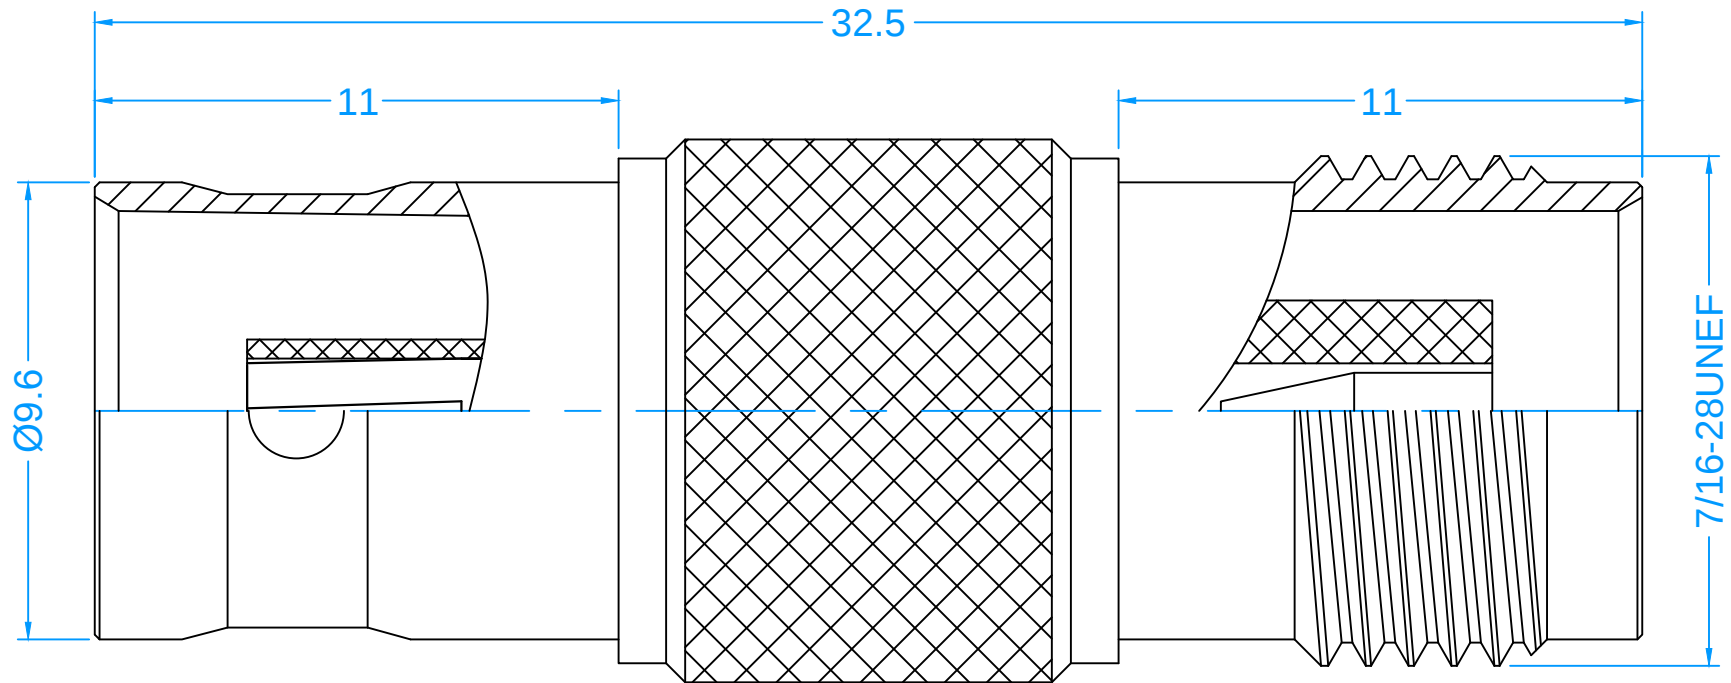

Meets MIL-C-39012, CECC 22120, CECC 22200, IEC 60169-8, IEC 60169-17.
Precision Machining and High Quality Grade Material

TECHNICAL CHARACTERISTICS

Impedance	50Ω	Frequency Range	DC-6GHz
Working Voltage	<500V r.m.s	Withstanding Voltage	1500V r.m.s
Center Contact Resistance	≤1.5mΩ	Outer Contact Resistance	≤0.2mΩ
Insulation Resistance	≥5000MΩ	VSWR	≤1.25
Durability	≥500 cycles	Temperature Range	-45°C to 125°C

3	Contact	1	Brass	Gold
2	Insulator	1	PTFE	
1	Body	1	Brass	Nickel
No.	Description	QTY	Material	Finish

RoHS
Compliant

THIRD ANGLE PROJECTION

* MAJOR DIMENSION			
UNLESS OTHERWISE NOTED TOLERANCES			
SCALE	1:1	UNIT	MM

APPROVED TERRY	 KeMy Electronic Technology Inc.		
CHECKED JOHN	TITLE BNC (F) Jack to TNC (F) Jack Adapter		
DRAWN HENRY			
DRAWN DATE 10 Apr. 2008	DRAWING NO. KM-030132		REV 0