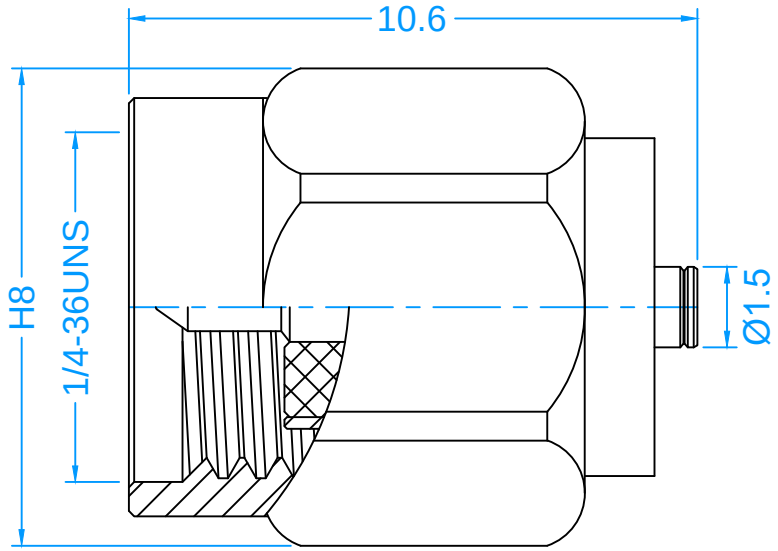


Meets MIL-C-39012, CECC 22110 and IEC60169-15.

TECHNICAL CHARACTERISTICS

Impedance	50Ω	Frequency Range	DC-6GHz
Working Voltage	60V r.m.s	Withstanding Voltage	200V r.m.s
Center Contact Resistance	≤3mΩ	Outer Contact Resistance	≤2.5mΩ
Insulation Resistance	≥500MΩ	VSWR	≤1.20
Durability	≥500 cycles	Temperature Range	-55°C to 155°C
Weight	2.18g ref.		

No.	Description	QTY	Material	Finish
4	Gasket	1	Silicone	
3	Contact	1	Brass	Gold
2	Insulator	1	PTFE	
1	Body	1	Stainless Steel	Passivated

RoHS Compliant

THIRD ANGLE PROJECTION

* MAJOR DIMENSION

UNLESS OTHERWISE NOTED TOLERANCES

SCALE 1:1 UNIT MM

APPROVED JOHN

CHECKED TERRY

DRAWN TINA

DRAWN DATE 15 Mar. 2013

KM KeMy Electronic Technology Inc.

TITLE
SMA (M) Plug to compatible MHF4 / AMC4 / HSC (M) Jack Adapter

DRAWING NO. KM-030214

REV 0

All rights reserved. www.dgkemy.com