
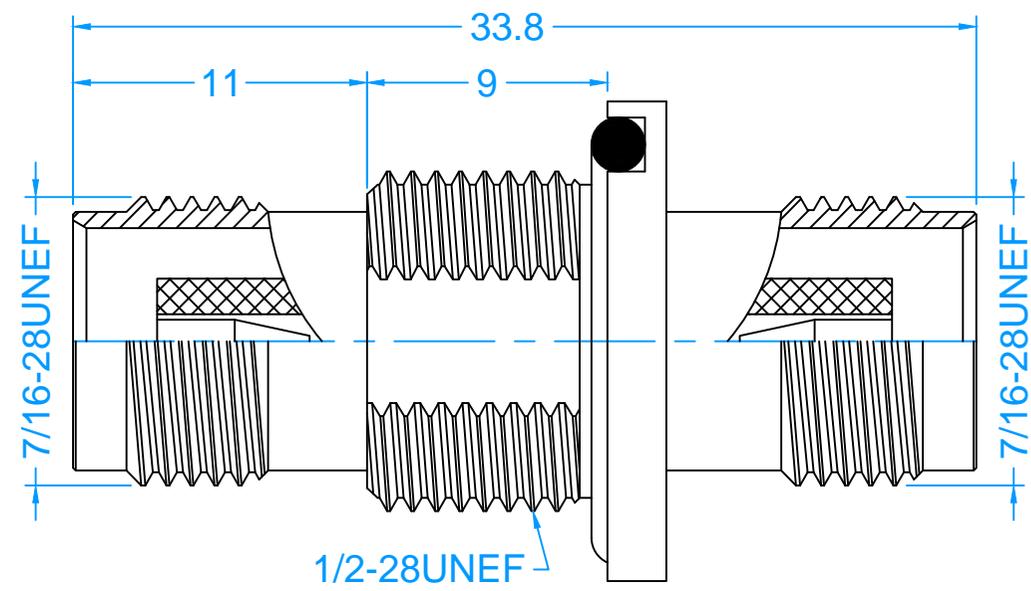
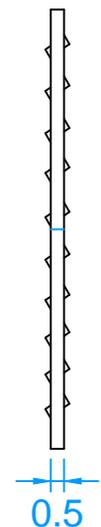


RECOMMENDED  
PANEL CUTOUT

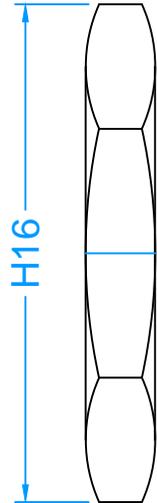

Meets MIL-C-39012, CECC 22200, IEC 60169-17, Precision Machining and High Quality Grade Material

TECHNICAL CHARACTERISTICS

Impedance	50Ω	Frequency Range	DC-6GHz
Working Voltage	<500V r.m.s	Withstanding Voltage	1500V r.m.s
Center Contact Resistance	≤1.5mΩ	Outer Contact Resistance	≤0.2mΩ
Insulation Resistance	≥5000MΩ	VSWR	≤1.20
Durability	≥500 cycles	Temperature Range	-45°C to 125°C

6	Nut	1	Brass	Nickel
5	Washer	1	Brass	Nickel
4	Gasket	1	Silicone	
3	Contact	1	Brass	Gold
2	Insulator	1	PTFE	
1	Body	1	Brass	Nickel

No.	Description	QTY	Material	Finish
8				
7				
6				
5				
4				
3				

**RoHS  
Compliant**

THIRD ANGLE PROJECTION

\* MAJOR DIMENSION  
UNLESS OTHERWISE  
NOTED TOLERANCES

SCALE 1:1 UNIT MM

APPROVED  
**TERRY**

CHECKED  
**JOHN**

DRAWN  
**HENRY**

DRAWN DATE  
18 Feb. 2009

**KM** KeMy Electronic Technology Inc.

TITLE  
**TNC (F) Jack to TNC (F) Jack Adapter,  
Bulkhead, Waterproof**

DRAWING NO. **KM-030314**

REV  
0