
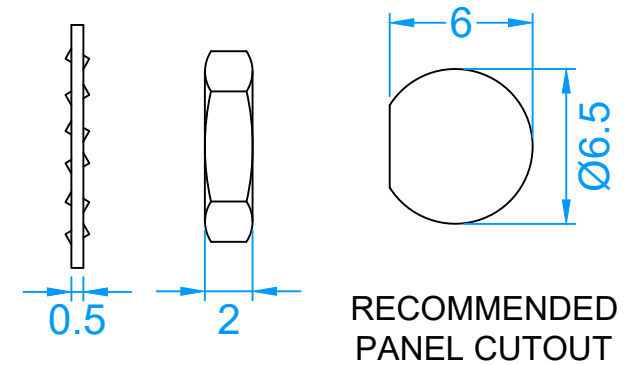


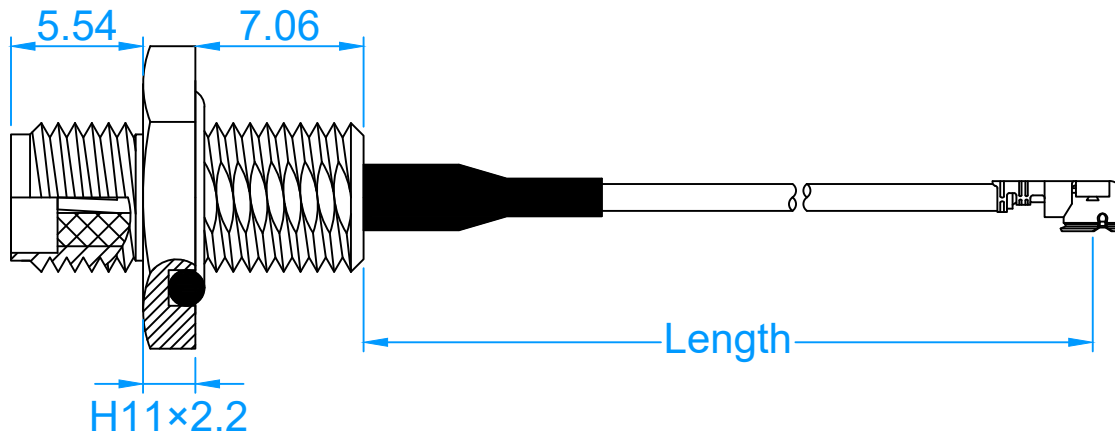

Part Number	Length (IN)	Length (MM)
KM-020242-0050	1.968±0.15	50±4
KM-020242-0100	3.937±0.15	100±4
KM-020242-0150	5.905±3%	150±3%
KM-020242-0200	7.874±3%	200±3%
KM-020242-0250	9.842±3%	250±3%

- Orient IPEX interface with respect to SMA 'D FLAT' as shown within $\pm 10^\circ$.
- Connector orientation is suggested for cable length less than 100mm.
- Additional lengths can be provided by changing XXXX to desired length in MM, or XXX in INCH, or XXM in METER.

4	Heat Shrink Tube	1	Black
3	IPEX MHF Plug	1	20278-112R-13
2	SMA (F) BHD Jack, Front Mount	1	KM-010131
1	Coaxial Cable	1	1.13mm
No.	Specification	QTY	Description

RoHS
Compliant

THIRD ANGLE PROJECTION

* MAJOR DIMENSION
UNLESS OTHERWISE
NOTED TOLERANCES

SCALE 1:1 UNIT MM

APPROVED
JOHN

CHECKED
TERRY

DRAWN
KEVIN

DRAWN DATE
Nov. 26, 2019

KM KeMy Electronic Technology Inc.

TITLE
IP67/68 SMA (F) BHD Jack, Front Mount -
1.13mm - IPEX MHF Plug, Various Lengths

DRAWING NO. KM-020242-XXXX
REV
A

All rights reserved. www.dgkemy.com