
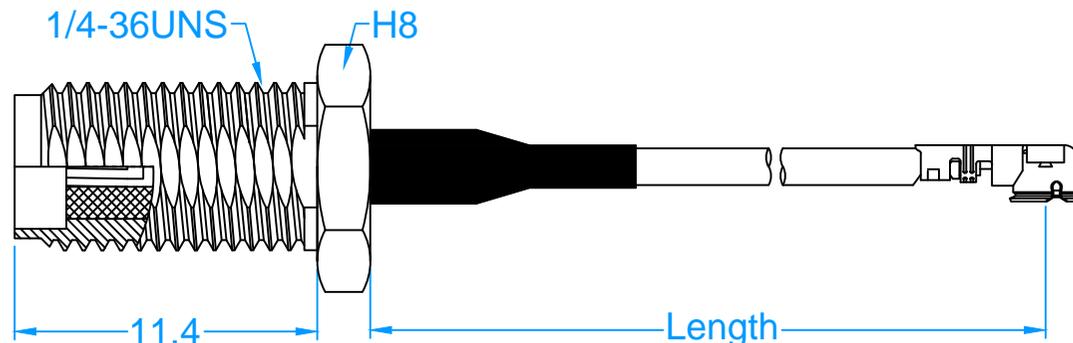



RECOMMENDED
PANEL CUTOUT



Part Number	Length (IN)	Length (MM)
KM-020406-0100	3.937±0.15	100±4
KM-020406-006I	6±0.15	152.4±4
KM-020406-001F	12±3%	304.8±3%

- Orient MHF plug interface with respect to SMA 'D FLAT' as shown within $\pm 45^\circ$, orientation for cable length less than 150mm only.
- Additional lengths can be provided by changing XXXX to desired length in MM, or XXXI in INCH, or XXXF in FEET.
- For other orientation, or any queries feel free to consult our sales team at sales@dgkemy.com

4	Heat Shrink Tube	1	Black
3	I-PEX MHF Plug	1	20351-112R-37
2	SMA (F) Jack, BHD	1	KM-010105
1	Coaxial Cable	1	1.37mm
No.	Specification	QTY	Description

**RoHS
Compliant**

THIRD ANGLE PROJECTION

* MAJOR DIMENSION
UNLESS OTHERWISE
NOTED TOLERANCES

SCALE 1:1 UNIT MM

APPROVED
JOHN

CHECKED
TERRY

DRAWN
KEVIN

DRAWN DATE
27 Oct. 2015

KM KeMy Electronic Technology Inc.

TITLE
SMA (F) Jack, BHD - 1.37mm - I-PEX
MHF Plug, Various Lengths

DRAWING NO. KM-020406-XXXX

REV
A