


Material and Finishes:  
 SMA (M) Plug, R/A - Brass, Gold Plating  
 RP TNC (F) Plug - Brass, Nickel Plating

Electrical:  
 Frequency: DC - 3 GHz  
 Impedance: 50 ohm  
 VSWR: 1.30 max.

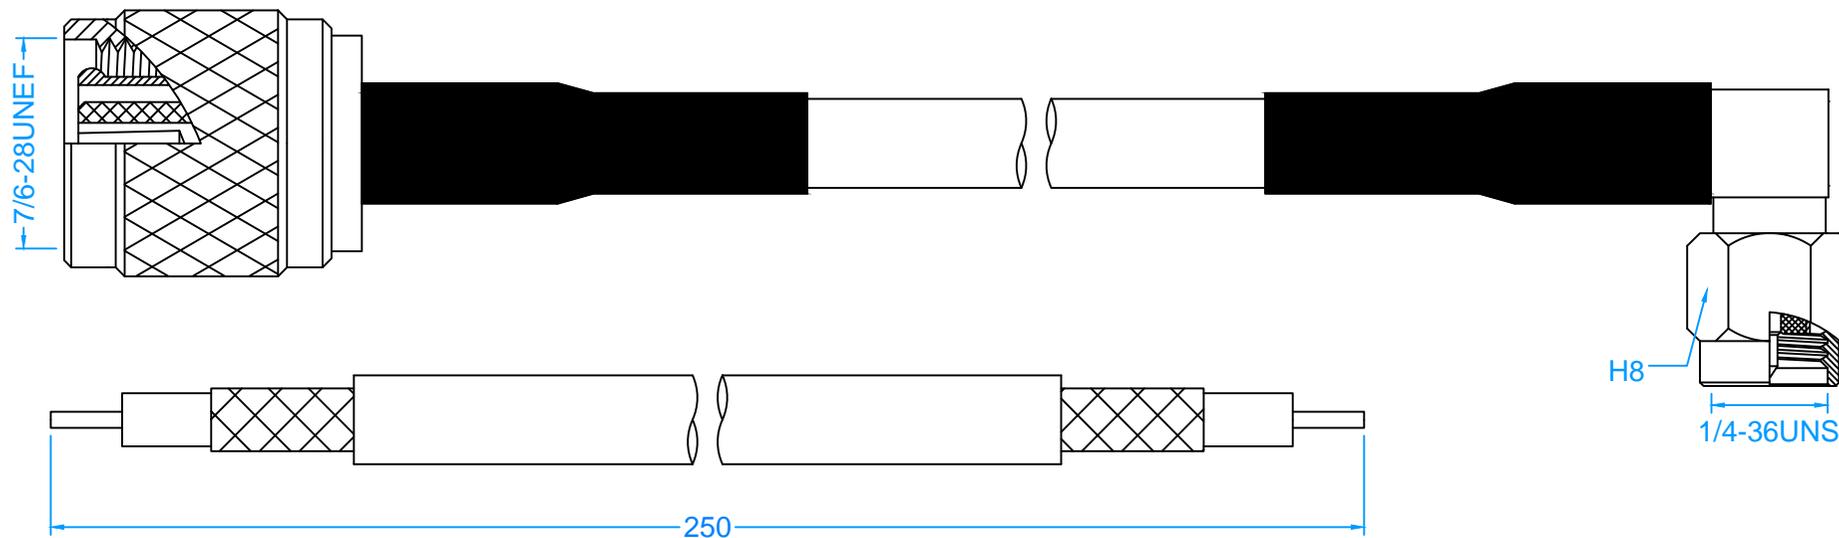

Part Number	Length (IN)	Length (MM)
KM-021222-0100	3.937±3%	100±3%
KM-021222-008I	8±3%	203.2±3%
KM-021222-001F	12±3%	304.8±3%
KM-021222-001M	39.370±3%	1000±3%

\* Additional lengths can be provided by replacing XXXX with the desired length in MM, or XXXI in INCH, or XXXF in FEET, or XXXM in METER.  
 \* Any queries please feel free to consult our sales team at SALES@DGKEMY.COM

4	Heat Shrink Tube	2	Black
3	SMA (M) Plug, R/A	1	KM-010135
2	RP TNC (F) Plug	1	KM-010507
1	Coaxial Cable	1	LL195

**RoHS  
Compliant**

\* MAJOR DIMENSION  
 UNLESS OTHERWISE  
 NOTED TOLERANCES

APPROVED  
**JOHN**  
 CHECKED  
**TERRY**  
 DRAWN  
**HENRY**

**KEM** KeMy Electronic Technology Inc.  
 TITLE  
 RP TNC (F) Plug - LL195 - SMA (M) Plug,  
 R/A, L= 250mm  
 DRAWING NO. **KM-021222-0250**  
 REV  
 A

No.	Specification	QTY	Description
-----	---------------	-----	-------------

THIRD ANGLE PROJECTION

SCALE 1:1 UNIT MM

DRAWN DATE  
 12 Jan. 2026

All rights reserved. www.dgkemy.com