


Meets MIL-C-39012; CECC 22120; IEC 60169-8, Precision Machining and High Quality Material

**TECHNICAL CHARACTERISTICS**

Impedance	75Ω	Frequency Range	DC ~ 4GHz
Working Voltage	<500V r.m.s	Withstanding Voltage	1500V r.m.s
Center Contact Resistance	≤1.5mΩ	Outer Contact Resistance	≤1mΩ
Insulation Resistance	≥5000MΩ	Durability	≥500 cycles
Temperature Range	-55°C to 155°C	Ferrule Hex Crimp Size	.128 (3.25mm)
Weight	8.82g REF.		

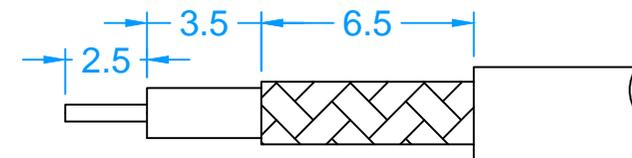

**CABLE TRIMMING DIMENSIONS**

4	Ferrule	1	Brass	Nickel
3	Contact	1	Brass	Gold
2	Insulator	1	PTFE	
1	Body	1	Brass	Nickel
No.	Description	QTY	Material	Finish

**RoHS  
Compliant**

THIRD ANGLE PROJECTION

* MAJOR DIMENSION UNLESS OTHERWISE NOTED TOLERANCES			
SCALE	1:1	UNIT	MM

APPROVED <b>JOHN</b>
CHECKED <b>TERRY</b>
DRAWN <b>HENRY</b>
DRAWN DATE 13 Jul. 2005

<b>KM</b> KeMy Electronic Technology Inc.	
TITLE BNC (M) Plug, for RG179, RG187	
DRAWING NO. KM-010402-179	
REV 0	