


Meets IEC61169-36, CECC 22220.
Precision Machining and High Quality Grade Material.

TECHNICAL CHARACTERISTICS

Impedance	50Ω
Frequency Range	DC-6GHz
Working Voltage	250V r.m.s
Withstanding Voltage	750V r.m.s
Center Contact Resistance	≤5mΩ
Outer Contact Resistance	≤2.5mΩ
Insulation Resistance	≥1000MΩ
VSWR	≤1.30
Durability	≥500 cycles
Temperature Range	-55°C to 155°C

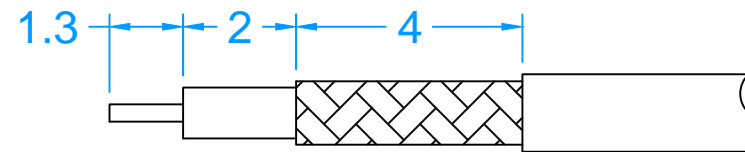

RECOMMENDED STRIP DIMS.

4	Cover	1	Brass	Gold
3	Contact	1	Brass	Gold
2	Insulator	2	PTFE	
1	Body	1	Brass	Gold
No.	Description	QTY	Material	Finish

**RoHS
Compliant**

* MAJOR DIMENSION
UNLESS OTHERWISE
NOTED TOLERANCES

APPROVED
JOHN

CHECKED
TERRY

DRAWN
KEVIN

DRAWN DATE
05 Mar. 2010

KM KeMy Electronic Technology Inc.

TITLE
MCX (M) Plug, Right Angle, for 1.37mm

DRAWING NO. **KM-010901-137** REV
0

THIRD ANGLE PROJECTION

SCALE 1:1 UNIT MM