
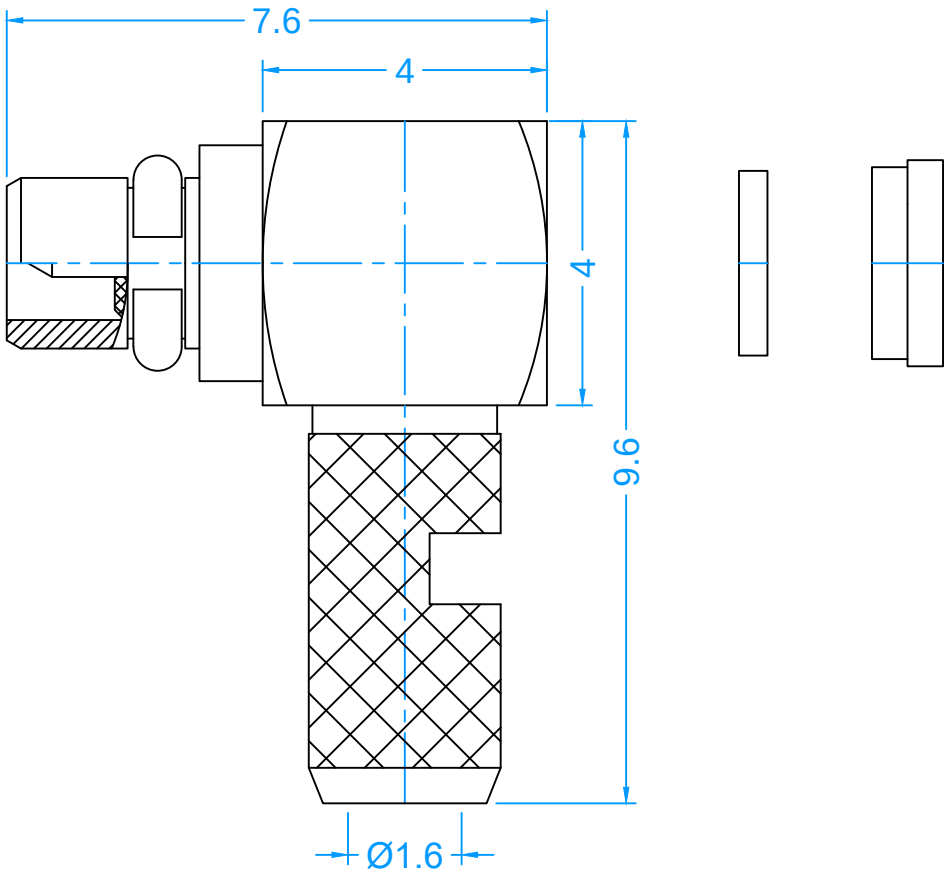


Meets CECC 22340, IEC 61169-52
Precision Machining and High Quality Grade Material

MAJOR TECHNICAL CHARACTERISTICS

Impedance	50Ω
Frequency Range	DC-6GHz
Working Voltage	<170V r.m.s
Withstanding Voltage	500V r.m.s
Center Contact Resistance	≤5mΩ
Outer Contact Resistance	≤2.5mΩ
Insulation Resistance	≥1000MΩ
VSWR	≤1.3
Durability	≥500 cycles
Temperature Range	-55°C to 155°C

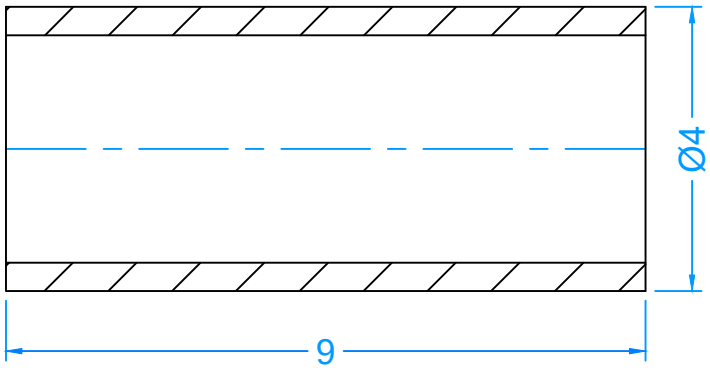

No.	Description	QTY	Material	Finish
6	Ferrule	1	Brass	Nickel
5	Cover	1	Brass	Gold
4	Rotate Ring	1	Be. Bronze	Gold
3	Contact	1	Brass	Gold
2	Insulator	2	PTFE	
1	Body	1	Brass	Gold

RoHS Compliant

* MAJOR DIMENSION
UNLESS OTHERWISE NOTED TOLERANCES

THIRD ANGLE PROJECTION | SCALE 1:1 | UNIT MM

APPROVED JOHN
CHECKED TERRY
DRAWN KEVIN
DRAWN DATE 16 Sep. 2007

KM KeMy Electronic Technology Inc.

TITLE
MMCX (M) Plug, Right Angle, for RG174, RG316

DRAWING NO. KM-011114-316

REV 0

All rights reserved. www.dgkemy.com