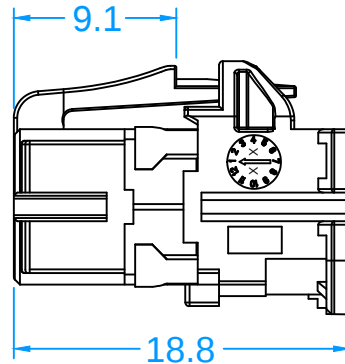
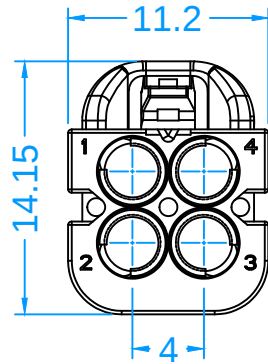


Meets MIL-STD-348. Precision Machined and High Quality Grade Material

TECHNICAL CHARACTERISTICS

Impedance 50Ω
Working Voltage 60V r.m.s
Center Contact Resistance ≤15MΩ
VSWR ≤1.3
Durability ≥50 cycles

Frequency Range DC ~ 6GHz
Withstanding Voltage 750V r.m.s
Outer Contact Resistance ≤7.5MΩ
Insulation Resistance ≥1000MΩ
Temperature Range -40°C to 105°C

7	Sleeve	4	Tinplate	Nickel
6	Locking Pin	2	Brass	Nickel
5	Plug-in Clip	2	PBT+30%GF	
4	Housing	1	PBT+30%GF	
3	Contact	4	Phosphorus Bronze	Gold
2	Insulator	4	PA	
1	Body	4	Phosphorus Bronze	Nickel
No.	Description	QTY	Material	Finish

RoHS
Compliant



THIRD ANGLE PROJECTION

* MAJOR DIMENSION
UNLESS OTHERWISE
NOTED TOLERANCES

SCALE 1:1 UNIT MM

APPROVED
JOHN

CHECKED
TERRY

DRAWN
KEVIN

DRAWN DATE
06 Apr. 2022



KeMy Electronic Technology Inc.

TITLE
Mini Fakra (F) Jack, Quad Port, Code X,
for RG174, RG316

DRAWING NO. KM-013706-X-174
REV 0

All rights reserved. www.dgkemy.com