


Meets MIL-C-39012, CECC 22210, IEC60169-16.
Precision Machining and High Quality Grade
Material

TECHNICAL CHARACTERISTICS

Impedance	50Ω
Frequency Range	DC-6 GHz
Working Voltage	1000V r.m.s
Withstanding Voltage	2500V r.m.s
Center Contact Resistance	≤1mΩ
Outer Contact Resistance	≤1mΩ
Insulation Resistance	≥5000MΩ
VSWR	≤1.30
Ferrule Hex Crimp Size	.610 (15.49mm)
Durability	≥500 cycles
Temperature Range	-55°C to 155°C

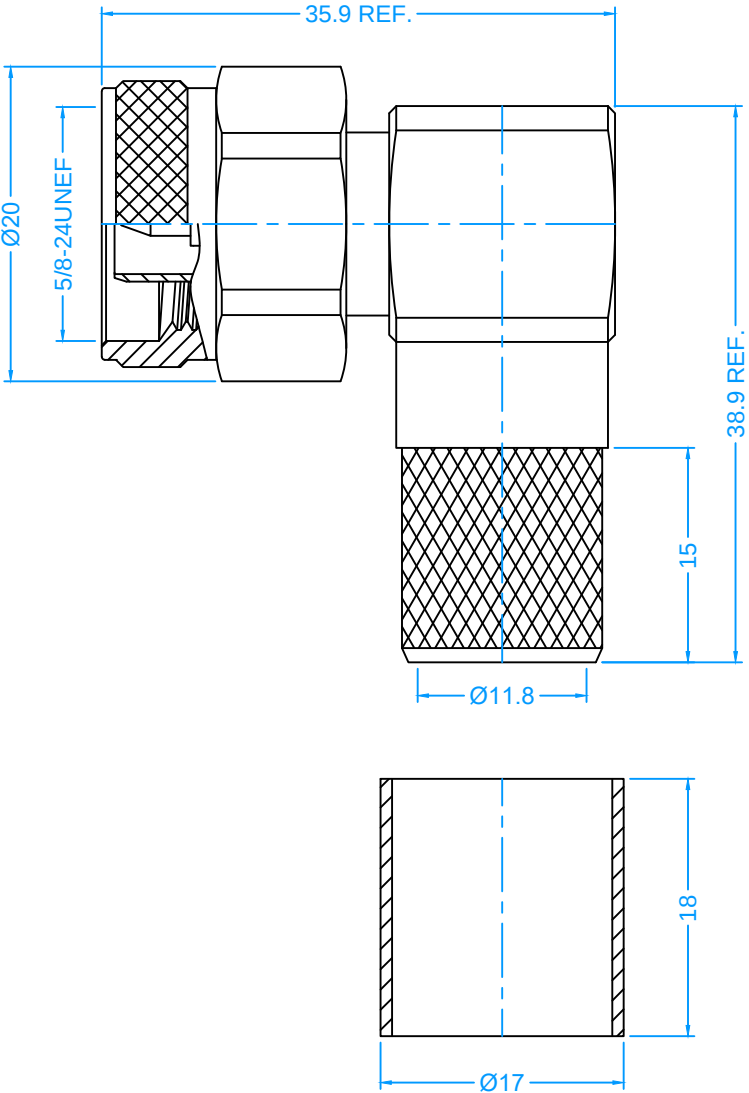

6	Ferrule	1	Brass	Nickel
5	Cover	1	Brass	Nickel
4	Gasket	1	Silicone	
3	Contact	1	Brass	Silver
2	Insulator	2	PTFE	
1	Body	1	Brass	Nickel
No.	Description	QTY	Material	Finish
8			7	6

RoHS Compliant	* MAJOR DIMENSION UNLESS OTHERWISE NOTED TOLERANCES			APPROVED JOHN	KeMy Electronic Technology Inc.	
				CHECKED TERRY	TITLE N (M) Plug, Right Angle, for LMR600	
				DRAWN HENRY	DRAWING NO. KM-010609-600	
				DRAWN DATE 20 Apr. 2015	REV 0	
THIRD ANGLE PROJECTION		SCALE	1:1	UNIT	MM	All rights reserved. www.dgkemy.com