


Meets MIL-C-39012, CECC 22210, IEC60169-16.
Precision Machined and High Quality Grade Material

TECHNICAL CHARACTERISTICS

Impedance	50Ω
Frequency Range	DC-6GHz
Working Voltage	1000V r.m.s
Withstanding Voltage	2500V r.m.s
Center Contact Resistance	≤1mΩ
Outer Contact Resistance	≤1mΩ
Insulation Resistance	≥5000MΩ
VSWR	≤1.25
Durability	≥500 cycles
Temperature Range	-55°C to 155°C
Weight	79.9g Ref.

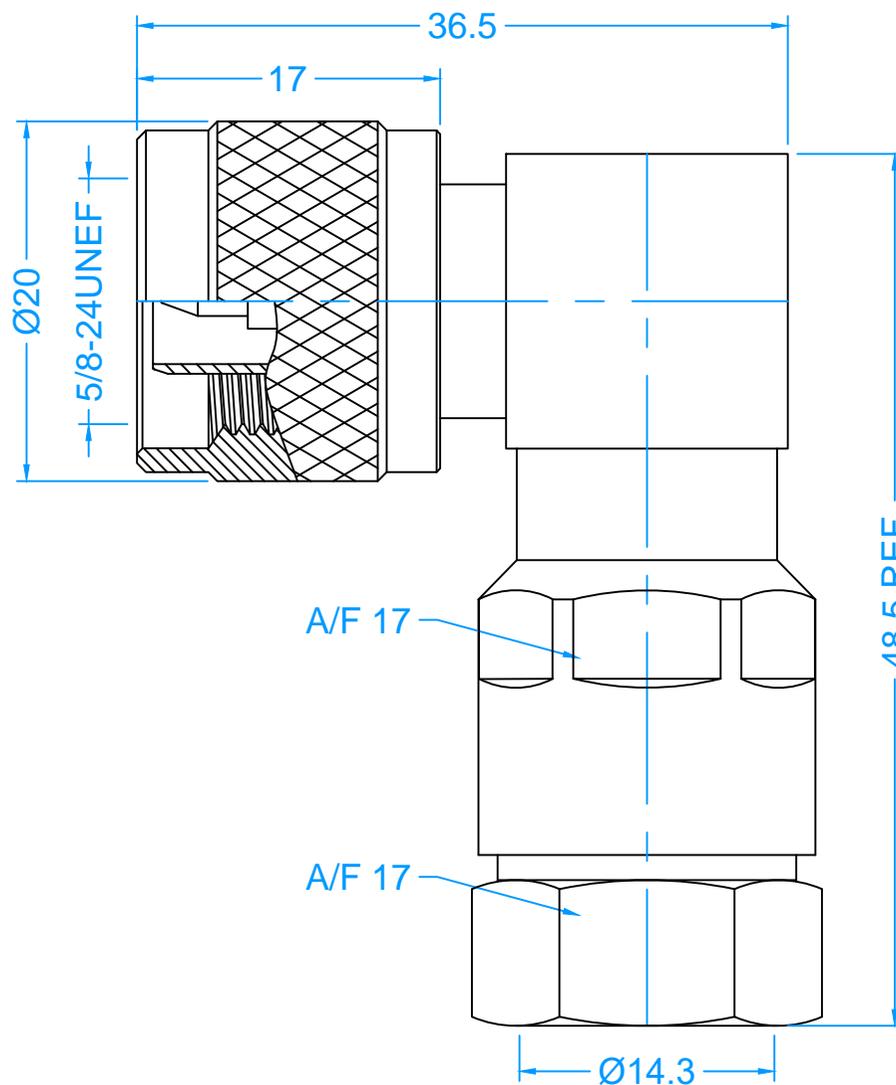

8	Coupling Nut	1	Brass	Nickel
7	Nut	1	Brass	Nickel
6	Clamp	1	Brass	Nickel
5	Gasket	3	Silicone	
3	Contact	2	Brass	Gold
2	Insulator	2	PTFE	
1	Body	1	Brass	Nickel
No.	Description	QTY	Material	Finish

RoHS Compliant	* MAJOR DIMENSION UNLESS OTHERWISE NOTED TOLERANCES		APPROVED TERRY	KM KeMy Electronic Technology Inc.	
			CHECKED JOHN		
			DRAWN HENRY	DRAWING NO. KM-010624-1-2S	
			DRAWN DATE 02 Apr. 2014		