
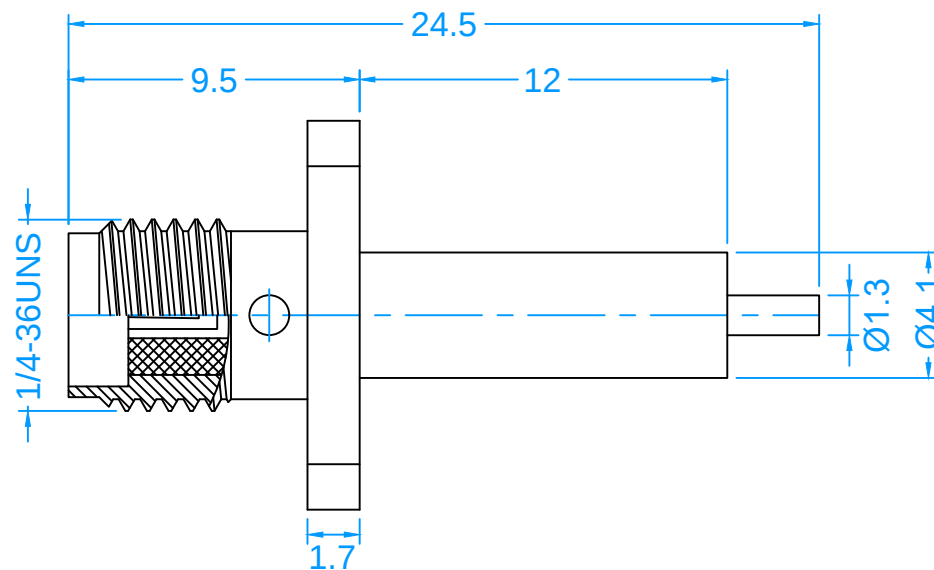


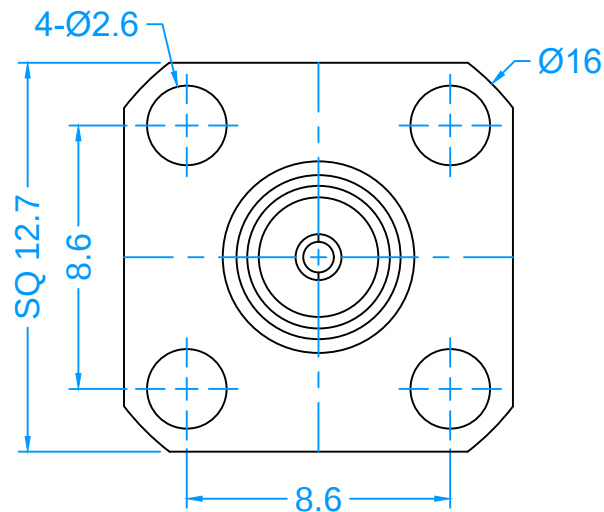


Meets MIL-C-39012, IEC60169-15, CECC 22110, Precision Machining and High Quality Grade Material

TECHNICAL CHARACTERISTICS

Impedance	50Ω	Frequency Range	DC-18GHz
Working Voltage	<335V r.m.s	Withstanding Voltage	1000V r.m.s
Center Contact Resistance	≤3mΩ	Outer Contact Resistance	≤2.5mΩ
Insulation Resistance	≥5000MΩ	VSWR	≤1.3
Durability	≥500 cycles	Temperature Range	-55°C to 155°C

3	Contact	1	Phos. Bronze	Gold
2	Insulator	1	PTFE	
1	Body	1	Brass	Gold
No.	Description	QTY	Material	Finish



* MAJOR DIMENSION			
UNLESS OTHERWISE NOTED TOLERANCES			
SCALE	1:1	UNIT	MM

APPROVED JOHN	 KeMy Electronic Technology Inc.		
CHECKED TERRY	TITLE SMA (F) Jack, 4-hole Flange Mount, Receptacle		
DRAWN KEVIN			
DRAWN DATE 07 Mar. 2012	DRAWING NO.	KM-010117-12	REV 0