


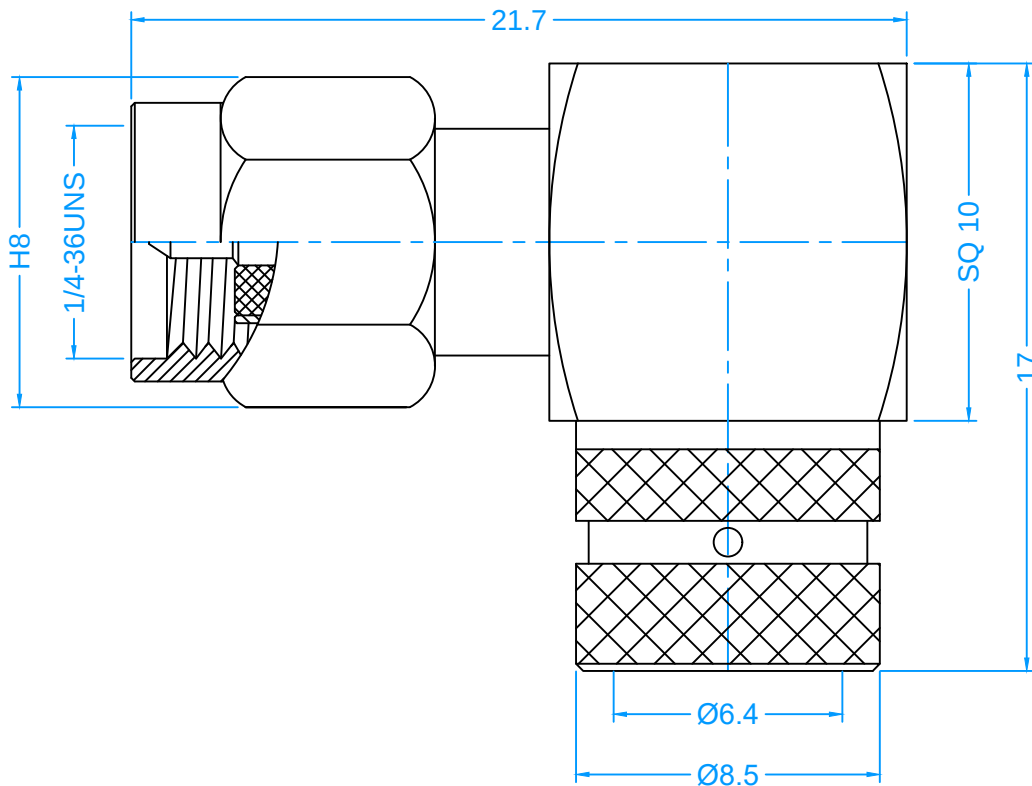

Meets MIL-C-39012, IEC60169-15, CECC 22110,
Precision Machining and High Quality Grade Material

TECHNICAL CHARACTERISTICS

Impedance	50Ω
Frequency Range	DC-8GHz
Working Voltage	<335V r.m.s
Withstanding Voltage	1000V r.m.s
Center Contact Resistance	≤3mΩ
Outer Contact Resistance	≤2.5mΩ
Insulation Resistance	≥5000MΩ
VSWR	≤1.3
Durability	≥500 cycles
Temperature Range	-55°C to 155°C

6	O ring	1	Silicone	
5	Spring	1	Beryllium Copper	Nickel
4	Coupling Nut	1	Brass	Gold
3	Contact	1	Brass	Gold
2	Insulator	1	PTFE	
1	Body	1	Brass	Gold
No.	Description	QTY	Material	Finish

RoHS
Compliant

* MAJOR DIMENSION
UNLESS OTHERWISE
NOTED TOLERANCES

APPROVED
JOHN

CHECKED
TERRY

DRAWN
KEVIN

DRAWN DATE
05 Mar. 2012

KM KeMy Electronic Technology Inc.

TITLE
SMA (M) Plug, Right Angle, for
.250, RG401

DRAWING NO. KM-010135-250

REV
0

All rights reserved. www.dgkemy.com