



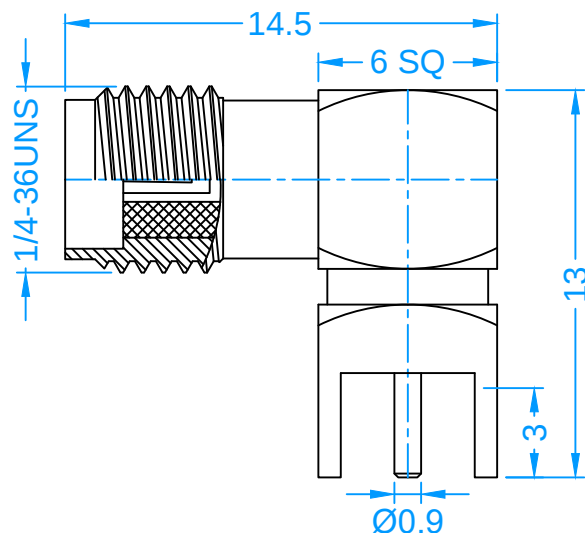

Meets MIL-C-39012, IEC60169-15, CECC 22110
Precision Machined and High Quality Material

TECHNICAL CHARACTERISTICS

Impedance	50Ω
Frequency Range	DC-6GHz
VSWR	≤1.20
Working Voltage	<335V r.m.s
Withstanding Voltage	1000V r.m.s
Center Contact Resistance	≤3mΩ
Outer Contact Resistance	≤2.5mΩ
Insulation Resistance	≥5000MΩ
Durability	≥500 cycles
Temperature Range	-55°C to 125°C

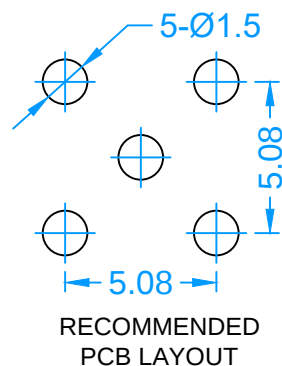

3	Contact	1	Beryllium Copper	Gold
2	Insulator	2	PTFE	
1	Body	1	Brass	Gold
No.	Description	QTY	Material	Finish

RoHS
Compliant

THIRD ANGLE PROJECTION

* MAJOR DIMENSION
UNLESS OTHERWISE
NOTED TOLERANCES

SCALE 1:1 UNIT MM

APPROVED
JOHN

CHECKED
TERRY

DRAWN
KEVIN

DRAWN DATE
20 Aug. 2009

KM KeMy Electronic Technology Inc.

TITLE
SMA (F) Jack, Right Angle, for PCB

DRAWING NO.
KM-010143-5

REV
0

All rights reserved. www.dgkemy.com