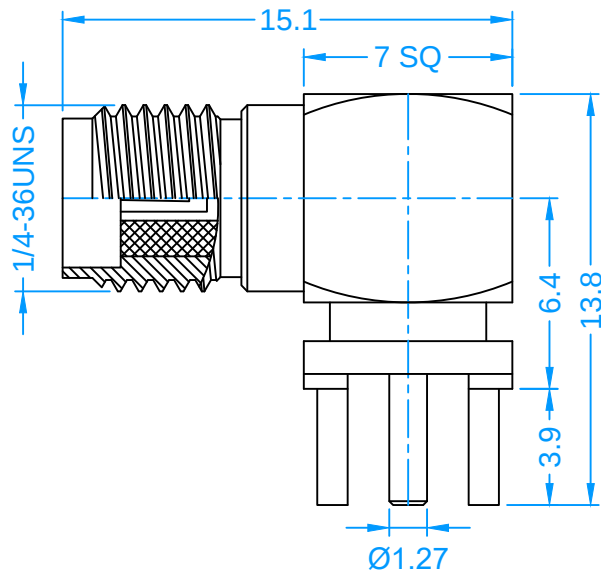


RECOMMENDED
PCB LAYOUT

Meets MIL-C-39012, IEC60169-15, CECC 22110
Precision Machined and High Quality Material

TECHNICAL CHARACTERISTICS

Impedance	50Ω
Frequency Range	DC-3GHz
VSWR	≤1.15
Working Voltage	<335V r.m.s
Withstanding Voltage	1000V r.m.s
Center Contact Resistance	≤3mΩ
Outer Contact Resistance	≤2.5mΩ
Insulation Resistance	≥5000MΩ
Durability	≥500 cycles
Temperature Range	-55°C to 125°C

3	Contact	1	Beryllium Copper	Gold
2	Insulator	2	PTFE	
1	Body	1	Brass	Gold
No.	Description	QTY	Material	Finish

RoHS
Compliant

THIRD ANGLE PROJECTION

* MAJOR DIMENSION UNLESS OTHERWISE NOTED TOLERANCES			
SCALE	1:1	UNIT	MM

APPROVED TERRY	KM KeMy Electronic Technology Inc. TITLE SMA (F) Jack, Right Angle, for PCB DRAWING NO. KM-010143-6 REV 0
CHECKED JOHN	
DRAWN KEVIN	
DRAWN DATE 08 Sep. 2009	