


Meets MIL-C-39012, CECC 22110, IEC60169-15, Precision Machining and High Quality Material

TECHNICAL CHARACTERISTICS

Impedance	50Ω	Frequency Range	DC-3GHz
Working Voltage	335V r.m.s	Withstanding Voltage	1000V r.m.s
Center Contact Resistance	≤3mΩ	Outer Contact Resistance	≤2.5mΩ
Insulation Resistance	≥5000MΩ	VSWR	Not Applicable
Durability	≥500 cycles	Temperature Range	-40°C to 125°C

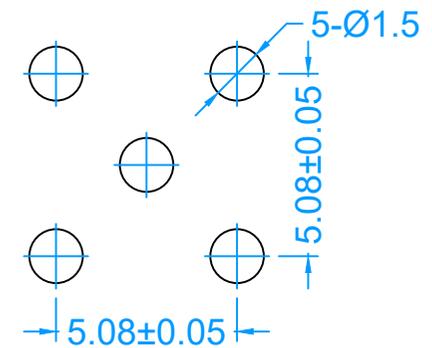

RECOMMENDED
PCB LAYOUT

5	Nut	1	Brass	Gold
4	Washer	1	Brass	Gold
3	Contact	1	Beryllium Bronze	Gold
2	Insulator	1	PTFE	Natural
1	Body	1	Brass	Gold
No.	Description	QTY	Material	Finish

RoHS Compliant	* MAJOR DIMENSION UNLESS OTHERWISE NOTED TOLERANCES		APPROVED JOHN	KEM KeMy Electronic Technology Inc.	
			CHECKED TERRY		TITLE SMA (F) Jack, Bulkhead, for PCB
			DRAWN KEVIN		DRAWING NO. KM-010146-2
© THIRD ANGLE PROJECTION		SCALE 1:1	UNIT MM	DRAWN DATE 08 Aug. 2012	REV 0