



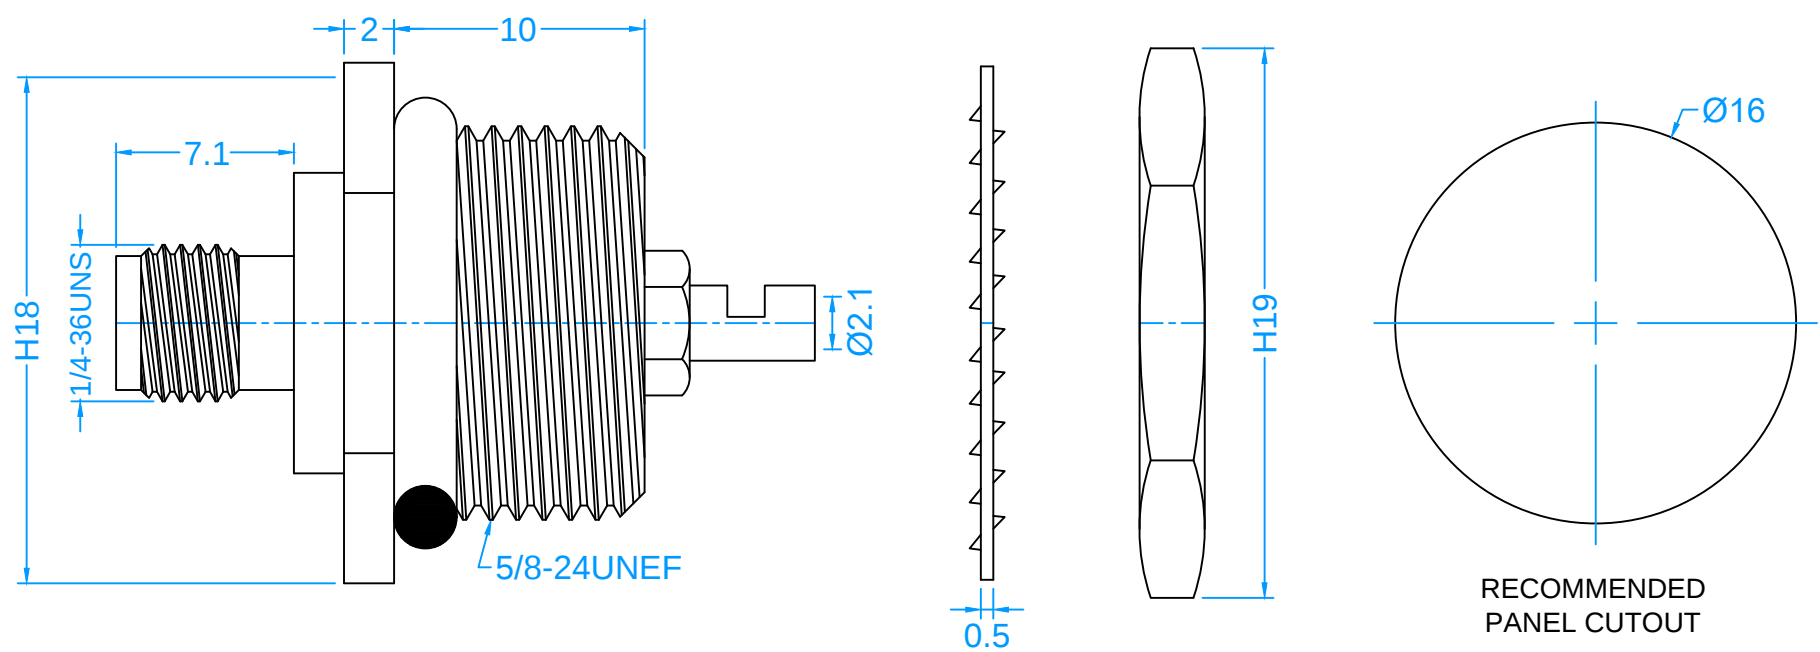

Meets MIL-C-39012, CECC 22110, IEC 60169-15. Precision Machining and High Quality Grade Material.

MAJOR TECHNICAL CHARACTERISTICS

Impedance	50Ω	Frequency Range	DC-3GHz
Working Voltage	<335V r.m.s	Withstanding Voltage	1000V r.m.s
Center Contact Resistance	≤3mΩ	Outer Contact Resistance	≤2.5mΩ
Insulation Resistance	≥5000MΩ	VSWR	≤1.30
Durability	≥500 cycles	Temperature Range	-65°C to 165°C

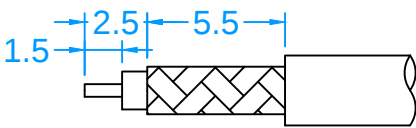

CABLE TRIMMING DIMENSIONS

6	Nut	1	Brass	Nickel
5	Washer	1	Brass	Nickel
4	Gasket	1	Silicone	
3	Contact	1	Brass	Gold
2	Insulator	1	PTFE	
1	Body	1	Brass	Nickel
No.	Description	QTY	Material	Finish

RoHS
Compliant



THIRD ANGLE PROJECTION

* MAJOR DIMENSION
UNLESS OTHERWISE
NOTED TOLERANCES

SCALE 1:1 UNIT MM

APPROVED

JOHN

CHECKED

TERRY

DRAWN

KEVIN

DRAWN DATE
04 Sep. 2012

KM KeMy Electronic Technology Inc.

TITLE
SMA (F) Jack, Bulkhead, Front Mount,
Waterproof, for RG316

DRAWING NO.

KM-010165-316

REV

0