
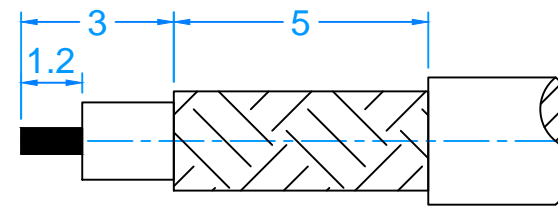


Meets MIL-STD-348,
Precision Machining and High Quality Grade Material

MAJOR TECHNICAL CHARACTERISTICS

Impedance	50Ω
Frequency Range	DC-6GHz
Working Voltage	<335V r.m.s
Withstanding Voltage	500V r.m.s
Center Contact Resistance	≤6mΩ
Outer Contact Resistance	≤2.0mΩ
Insulation Resistance	≥5000MΩ
VSWR	≤1.30
Durability	≥500 cycles
Temperature Range	-55°C to 125°C

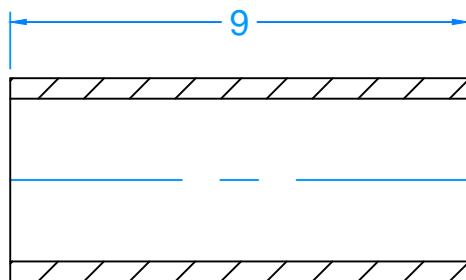

RECOMMENDED CABLE STRIP DIMS.

5	Ferrule	1	Brass	Nickel
4	Cover	1	Brass	Gold
3	Contact	1	Be. Bronze	Gold
2	Insulator	1	PTFE	
1	Body	1	Be. Bronze	Gold
No.	Description	QTY	Material	Finish

RoHS Compliant

THIRD ANGLE PROJECTION

* MAJOR DIMENSION
UNLESS OTHERWISE NOTED TOLERANCES

SCALE 1:1 UNIT MM

APPROVED
JOHN

CHECKED
TERRY

DRAWN
KEVIN

DRAWN DATE
08 May 2012

KM KeMy Electronic Technology Inc.

TITLE
SMP (F) Jack, Right Angle, for RG316

DRAWING NO. **KM-011206-316**

REV
0