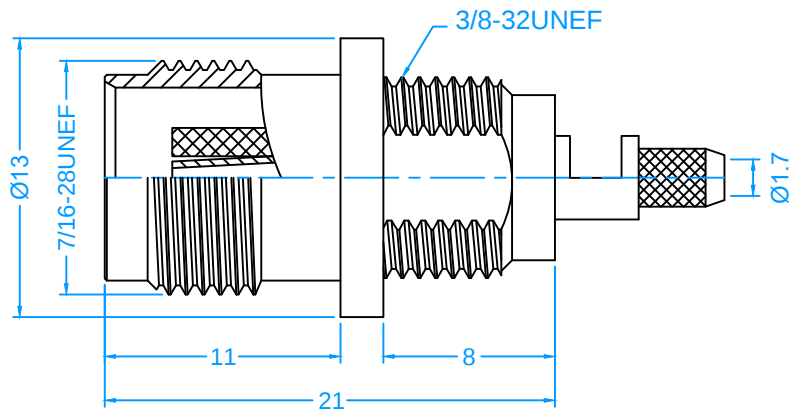


RECOMMENDED
PANEL CUTOUT

Meets MIL-C-39012, CECC 22200, IEC60169-17, Precision Machining and High Quality Grade Material

TECHNICAL CHARACTERISTICS

Impedance	50Ω	Frequency Range	DC-3GHz
Working Voltage	500V r.m.s	Withstanding Voltage	<1500V r.m.s
Center Contact Resistance	≤4mΩ	Outer Contact Resistance	≤1.5mΩ
Insulation Resistance	≥5000MΩ	VSWR	≤1.3
Durability	≥500 cycles	Temperature Range	-55°C to 155°C

6	Nut	1	Brass	Nickel
5	Washer	1	Brass	Nickel
4	Ferrule	1	Brass	Nickel
3	Contact	1	Brass	Gold
2	Insulator	1	PTFE	Natural
1	Body	1	Brass	Nickel

No.	Description	QTY	Material	Finish
8			7	6

RoHS
Compliant



THIRD ANGLE PROJECTION

* MAJOR DIMENSION
UNLESS OTHERWISE
NOTED TOLERANCES

SCALE 1:1 UNIT MM

APPROVED
JOHN

CHECKED
TERRY

DRAWN
KEVIN

DRAWN DATE
13 Oct. 2009

KM KeMy Electronic Technology Inc.

TITLE
TNC (F) Jack, Bulkhead, Front Mount, for
RG174, RG316

DRAWING NO. KM-010516-174

REV
0

All rights reserved. www.dgkemy.com