


Meets MIL-C-39012, CECC 22200, IEC60169-17, Precision Machining and High Quality Grade Material

TECHNICAL CHARACTERISTICS

Impedance	50Ω	Frequency Range	DC-3GHz
Working Voltage	500V r.m.s	Withstanding Voltage	<1500V r.m.s
Center Contact Resistance	≤4mΩ	Outer Contact Resistance	≤1.5mΩ
Insulation Resistance	≥5000MΩ	VSWR	≤1.22
Durability	≥500 cycles	Temperature Range	-55°C to 155°C
Ferrule Hex Crimp Size	.128 (3.25mm)	Weight	17.13g Ref.

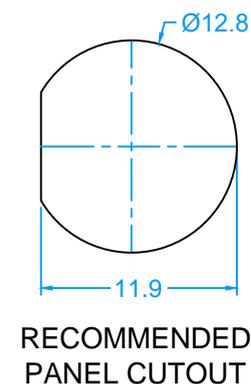

7	Nut	1	Brass	Nickel
6	Washer	1	Brass	Nickel
5	Ferrule	1	Brass	Nickel
4	Gasket	1	Silicone	
3	Contact	1	Brass	Gold
2	Insulator	1	PTFE	
1	Body	1	Brass	Nickel

No.	Description	QTY	Material	Finish
8				
7				
6				
5				
4				
3				

<h1>RoHS Compliant</h1>	* MAJOR DIMENSION UNLESS OTHERWISE NOTED TOLERANCES		APPROVED JOHN	KeMy Electronic Technology Inc.	
			CHECKED TERRY		TITLE RP TNC (M) Jack, Bulkhead, IP67, Crimp, for LMR100, RG174, RG316
			DRAWN HENRY		DRAWING NO. KM-010519-174
			DRAWN DATE 18 May 2010		REV 0

All rights reserved. www.dgkemy.com