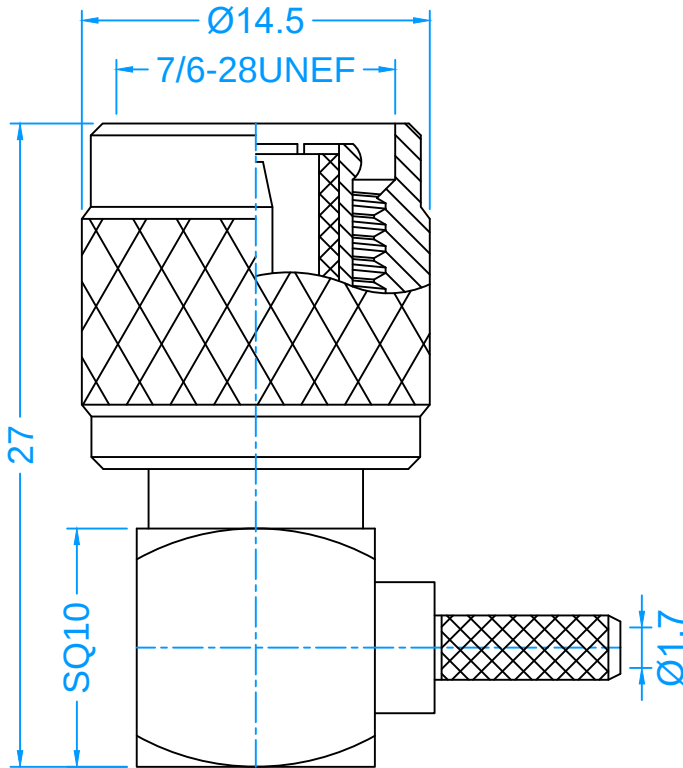


CABLE TRIMMING DIMENSIONS

Meets MIL-C-39012, CECC 22200, IEC60169-17, Precision Machining and High Quality Material.

TECHNICAL CHARACTERISTICS

Impedance	50Ω
Frequency Range	DC ~ 6GHz
Working Voltage	500V r.m.s
Withstanding Voltage	<1500V r.m.s
Center Contact Resistance	≤4mΩ
Outer Contact Resistance	≤1.5mΩ
Insulation Resistance	≥5000MΩ
VSWR	≤1.30
Durability	≥500 cycles
Temperature Range	-55°C to 155°C
Ferrule Hex Crimp Size	.128 (3.25mm)

5	Ferrule	1	Brass	Nickel
4	Cover	1	Brass	Nickel
3	Contact	1	Brass	Gold
2	Insulator	2	PTFE	Natural
1	Body	1	Brass	Nickel
No.	Description	QTY	Material	Finish

RoHS Compliant	* MAJOR DIMENSION UNLESS OTHERWISE NOTED TOLERANCES			APPROVED JOHN	KeMy Electronic Technology Inc.	
				CHECKED TERRY	TITLE TNC (M) Plug, R/A, for RG174, RG316	
				DRAWN HENRY	DRAWING NO. KM-010535-174	
	THIRD ANGLE PROJECTION			SCALE 1:1	UNIT MM	REV 0